

- Class leading standard feature set, including stereo encoder, RBDS/RDS generator, SCA, etc.
- Built in compressor/limiter
- Efficient OLED front panel monitoring
- World class reliability and quality from North American design and manufacture
- Frequency agile 87.5 - 108MHz
- AES, S/PDIF, and analog audio inputs standard
- Unmatched efficiency with state-of-the-art transistors and power supply
- Extensive monitoring through Ethernet, SNMP, and parallel interface
- 2 Year Warranty

AUDIO CHARACTERISTICS

Mono Operation	<i>Input Impedance</i>	600Ω, 10 KΩ (selectable from front panel)
	<i>Input Connector</i>	XLR (balanced), RCA (unbalanced)
	<i>Input Level Max</i>	+10 dBm +/- 2dB (others available)
	<i>Harmonic Distortion</i>	<1% (50 Hz-15KHz)
	<i>S/N Ratio</i>	>-60dB FM noise, >-50dB AM noise
	<i>Pre-emphasis</i>	25, 50, 75 μS, or flat response (selectable)
MPX Operation	<i>Input Impedance</i>	10 KΩ unbalanced
	<i>Input Connector</i>	BNC
	<i>Harmonic Distortion</i>	< 1% (50 Hz-15KHz)
SCA Operation	<i>Number of Inputs</i>	2
	<i>Input Connector</i>	BNC female
	<i>Input Level</i>	+10 dBm nominal
	<i>Frequency Range</i>	57 to 93 kHz
Digital Audio	<i>AES/EBU</i>	XLR, 3-position, female
	<i>S/PDIF</i>	optical, Toslink
	<i>S/PDIF</i>	coaxial, RCA female

RF CHARACTERISTICS

<i>Output Impedance</i>	50 Ω
<i>Modulation</i>	FM, Deviation ± 75 KHz
<i>Frequency Range</i>	87.5 – 108.0 MHz (± 1 kHz stability)
<i>Nominal Output Power</i>	2,000W
<i>Power Level</i>	Adjustable 1 – 105%
<i>Output Connector</i>	7-16 DIN female, (others upon request)
<i>Spurious Emissions</i>	Compliant to Industry Canada BETS-6 and FCC 73.317

ELECTRICAL

<i>Flexible AC Input</i>	180-264 Vac, 47/63 Hz Other AC supplies available on request
--------------------------	---

** Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. **

INTERFACE


Remote Port	<i>Control:</i>	RF carrier on/off, RF power up/down, reset
	<i>Monitor:</i>	Forward/reflected RF level, control PCB Vcc
	<i>Flags:</i>	Amplifier overdrive, VSWR (adjustable trip point), high temperature
Ethernet	<i>Control:</i>	RF carrier on/off, RF power up/down, AGC/manual, change VSWR trip point, reset
	<i>Monitor:</i>	Forward/reflected RF level, DC pallet voltage, RF input level, temperature, VSWR trip point, model, S/N
	<i>Flags:</i>	Carrier on/off, amplifier overdrive, DC pallet voltage, VSWR, RF input level, temperature, AGC/manual status
SNMP	<i>Control:</i>	RF carrier on/off, RF power up/down, AGC/manual, change VSWR trip point, reset
	<i>Monitor:</i>	Forward/reflected RF level, DC pallet voltage, RF input level, temperature, pallet current, attenuation, run time, RF fault, model/serial number
	<i>Flags:</i>	Amplifier overdrive, VSWR, temperature, SNMP error
RBDS/RDS	<i>Input Connector</i>	USB
	<i>Features</i>	Scrolling, parsing, advanced weekly scheduling, UECP, ASCII terminal control
	<i>Supported Commands</i>	PI, PS, PTY, TP, AF, TA, PTYN, DI, EON, RT+, M/S, PIN, ECC, RT, TDC, IH, ODA, CT, LIC, TMC

PHYSICAL FEATURES

Minimal Rack Space	4U case, 7"H x 25"D x 19"W
Lightweight Enclosures	70 lbs, Aluminum
Operating Temperature	0 to +45° C
Humidity	90%, non-condensing



OLED Display Screen

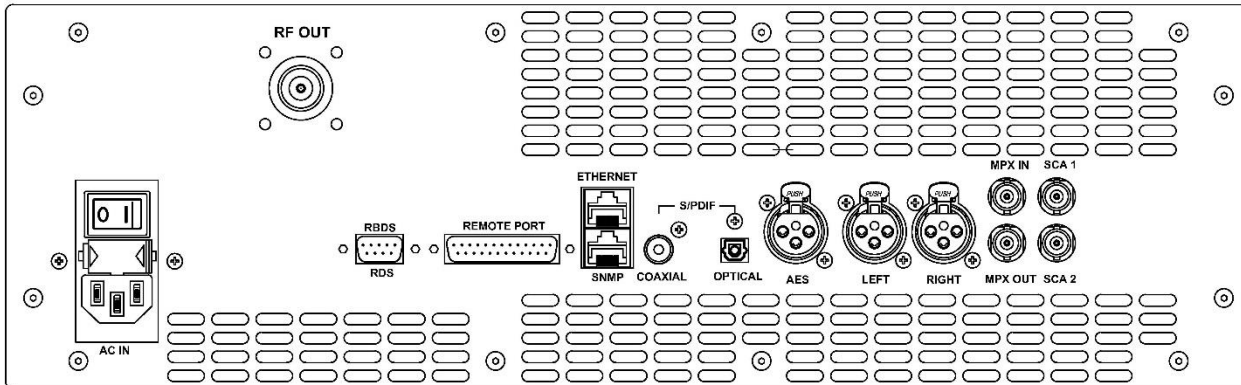

** Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. **